

Q-Flex Axle Order Form (10,000 LB Capacity)

Axis Trailer Products, Inc. ● Elkhart, IN. ● Phone 574.264.7955 ● Fax 574.266.83 3 3 ● axistrailer products.com


Q-Flex axles have a square or four-sided shape tube


Date:
Customer:
Address:
City: State: Zip:
Phone:
Fax:
Trailer Manufacturer:
Trailer Make:
Trailer Model:
Capacity:
Hub Face Dimension: (see drawing)
Bracket Dimension: (see drawing)
☐ Inside of Bracket ☐ Outside of Bracket
Track Width Dimension: (see drawing)
Bracket Orientation: (see drawing)
☐ Inboard (long leg inward) ☐ Outboard (long leg outward)
Bracket Height: ☐ Hi-Pro 1"(std) ☐ Lo-Pro
Mount Type: Removable Side Mount Attaching Kit
Hub Pilot: ☐ 4.75 ☐ 4.88
Brake Type: (if desired) □ Idler □ Disc
Electric 🗌 Hydraulic
Wheel Nut: Swivel Flange Nuts
☐ Tension Ring w/Cone Nuts
Pre-wired: ☐ Yes ☐ No
Start Angle: (see drawing)
Lubrication: Grease Oil Bath
Paint: Paint Raw
raint:
Natas
Notes:
Customer PO:
Customer PO:
Quantity:
Customer Signature:

For BEAM ONLY orders - Do not complete shaded section

Hub Face measurements are only available in 1/4" increments. More detailed axle information can be found in the Axis product catalog.

		Overhang	
Axle Type	Capacity	Minimum	Maximum
QF-100	10,000	23"	34"

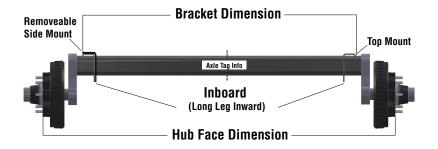

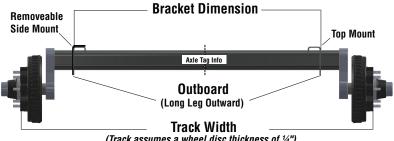

(Track assumes a wheel disc thickness of 1/4")

Start Angle (measure when unloaded)



