

Q-Flex Axle Order Form (500 - 8,000 LB Capacity)

Q-Flex axles have a square or four-sided shape tube

For BEAM ONLY orders - Do not complete shaded section

Date: _____
 Customer: _____
 Address: _____
 City: _____ State: _____ Zip: _____
 Phone: _____
 Fax: _____

Trailer Manufacturer: _____
 Trailer Make: _____
 Trailer Model: _____
 Capacity: _____

Axle Type: Straight Drop Center
 Axle w/Brake Flange: Yes No
 Camber: Yes No

Hub Face Dimension: (see drawing) _____

Bracket Dimension: (see drawing - choose only one dimension)
 Inside of Bracket _____
 Outside of Bracket _____
 Center of Bracket _____

Bracket Orientation: (see drawing)
 Inboard (long leg inward) Outboard (long leg outward)

Bracket Height: Lo-Pro Hi-Pro 1" Hi-Pro 3"
 Mount Type: Top Mount Side Mount
 Removable Side Mount Attaching Kit

Hub Bolt Pattern: (if desired) _____

Brake Type: (if desired) Idler Disc Electric
 Electric w/Park Hydraulic Free-Backing
 Hydraulic Free-Backing w/Park
 Hydraulic w/Uni-Servo Hydraulic w/Duo-Servo
 Wheel Stud Size: 7k w/8-bolt 1/2" 9/16" 5/8"
 8k w/8-bolt 9/16" 5/8"

Pre-wired: Yes No

Start Angle: (see drawing) _____

Lubrication: Grease Ultralube Oil Bath (7k-8k)

Paint: Paint Galvanized E-Coat Raw

Notes: _____


Customer PO: _____

Quantity: _____


Customer Signature: _____

Hub Face measurements are only available in 1/4" increments. More detailed axle information can be found in the Axis product catalog.

Straight Axle


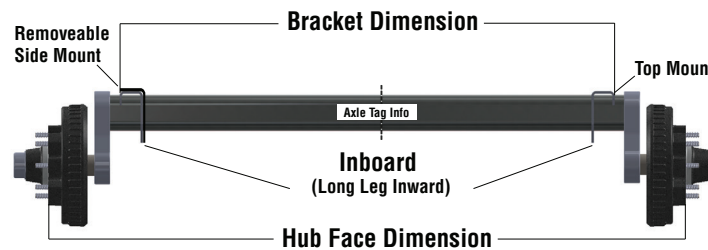


Drop Center Axle

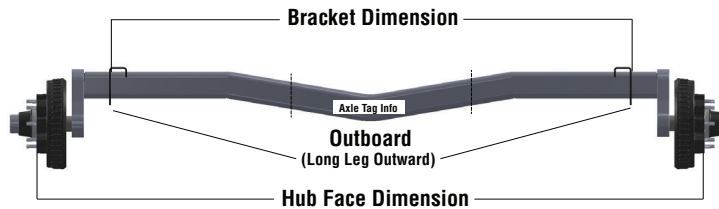


Axle Type	Capacity	Overhang	
		Minimum	Maximum
QF-22	500-2200	13.00"	21.75"
QF-35	2700-3500	13.00"	23.625"
QF-60	6000	13.50"	26.00"
QF-70	7000	13.50"	34.00"
QF-80 12" x 2"	8000	14"	21"
QF-80 12" x 3 3/8"	8000	17.25"	21"

Start Angle (measure when unloaded)

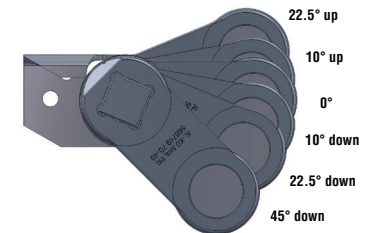

440

4 Lug



545, 5475, 550, 555

5 Lug
(Please see diagram for measurement directions)



655

6 Lug
10" - 12"



HD-HCS-5S

5 Lug
Demountable 12"



865

8 Lug